

SCREEN

# NATURE

 **GreenScreen™**



COLLECTION  
**2018**  
**2021**

INTELLIGENT FABRICS FOR SOLAR PROTECTION



INTERNAL  
APPLICATION

# SCREEN NATURE

## ENVIRONMENTAL QUALITY SCREEN:

PVC FREE, HALOGEN FREE, POLYESTER FREE

EXCELLENT

## TRANSPARENCY

## INCOMBUSTIBLE

- Mineral composition designed for a **MINIMUM ENVIRONMENTAL IMPACT**

- **INCOMBUSTIBLE**, smoke emission free: **M0** (NFP 92 503), Euroclass **A2-s1-d0, F0**

- **VERY GOOD GLARE CONTROL**: up to 95% ( $T_v = 5\%$ ) of light rays filtered, comfort classification 3 (good effect) according to EN 14501 standard

- **THERMAL COMFORT**: up to 82% of solar energy eliminated ( $g_{tot} = 0,18$  / glazing  $g = 0,32$  and  $U = 1,1$ )

- Elegant fabric design and **FINE**, ideal for blinds in **COMPACT SPACES**

- 8 colours available in 180 cm and **240 CM** widths

- **DIMENSIONAL STABILITY, DURABILITY** (test of 10.000 cycles, class 3 NF EN 13120), **MECHANICAL RESISTANCE**: perfect flatness even in large dimensions


- Health & Safety: conforms to standard requirements for buildings open to the public

## TECHNICAL DATA

SCREEN NATURE			
Composition	Glass fabric with fire-proof PVC-free and halogen-free coating		
Fire, smoke classification and other official test reports*	<b>M0 - M1</b> (F) - NFP 92 503 <b>A2</b> (DE) - DIN 4102-1 <b>BS</b> (GB) - 476 Pt 6 & 7 Class 0 <b>C UNO</b> (IT) - UNI 9177	<b>Euroclass A2-s1-d0</b> (EU) - EN 13501-1 mounted according to EN 13823 & EN 14716	<b>FR</b> (US) - NFPA 701 <b>F0</b> (F) - NF F 16-101 <b>HHV</b> : 1,91 MJ/kg (0,32 MJ/m <sup>2</sup> )
Health, safety	<b>Greenguard® GOLD</b> : Guarantee of indoor air quality (VOC) <b>Antibacterial</b> : More than 99% of bacteria destroyed - ASTM E 2180		
Openness factor	4%		
UV screen	Up to 95%		
Widths	180 - 240 cm		
Weight/m <sup>2</sup>	170 g ± 5% - ISO 2286 - 2		
Thickness	0,23 mm ± 5% - ISO 2286 - 3		
Colour Fastness to light (scale of 8)	7/8 - ISO 105 B02 (white not graded)		
Mechanical resistance	<b>Breaking</b>	<b>Tear</b>	<b>Folding</b>
Warp	> 100 daN/5 cm	≥ 3 daN	≥ 30 daN/5 cm
Weft	> 110 daN/5 cm	≥ 3 daN	≥ 30 daN/5 cm
	ISO 1421	EN 1875-3	ISO 1421**
Elongation (warp and weft)	< 5% - ISO 1421		
Packaging	Rolls of 50 lm		
Making up	Advice note on request		

This product's technical data are in conformity with this brochure as of the date of publication. MERMET SAS reserves the right to change the technical data; only those provided on the company's website [www.sunscreen-mermet.com](http://www.sunscreen-mermet.com) shall be deemed to be authentic. Where applicable, MERMET SAS also reserves the right to withdraw this product from sale should any of the technical properties or characteristics set out above prove to be inadequate or rendered impossible as a result of a change in regulations or in knowledge or understanding. \* Reports available on request, please contact Mermet \*\* Internal procedure derived from ISO 1421 standard

WIDTHS: 180 - 240 CM

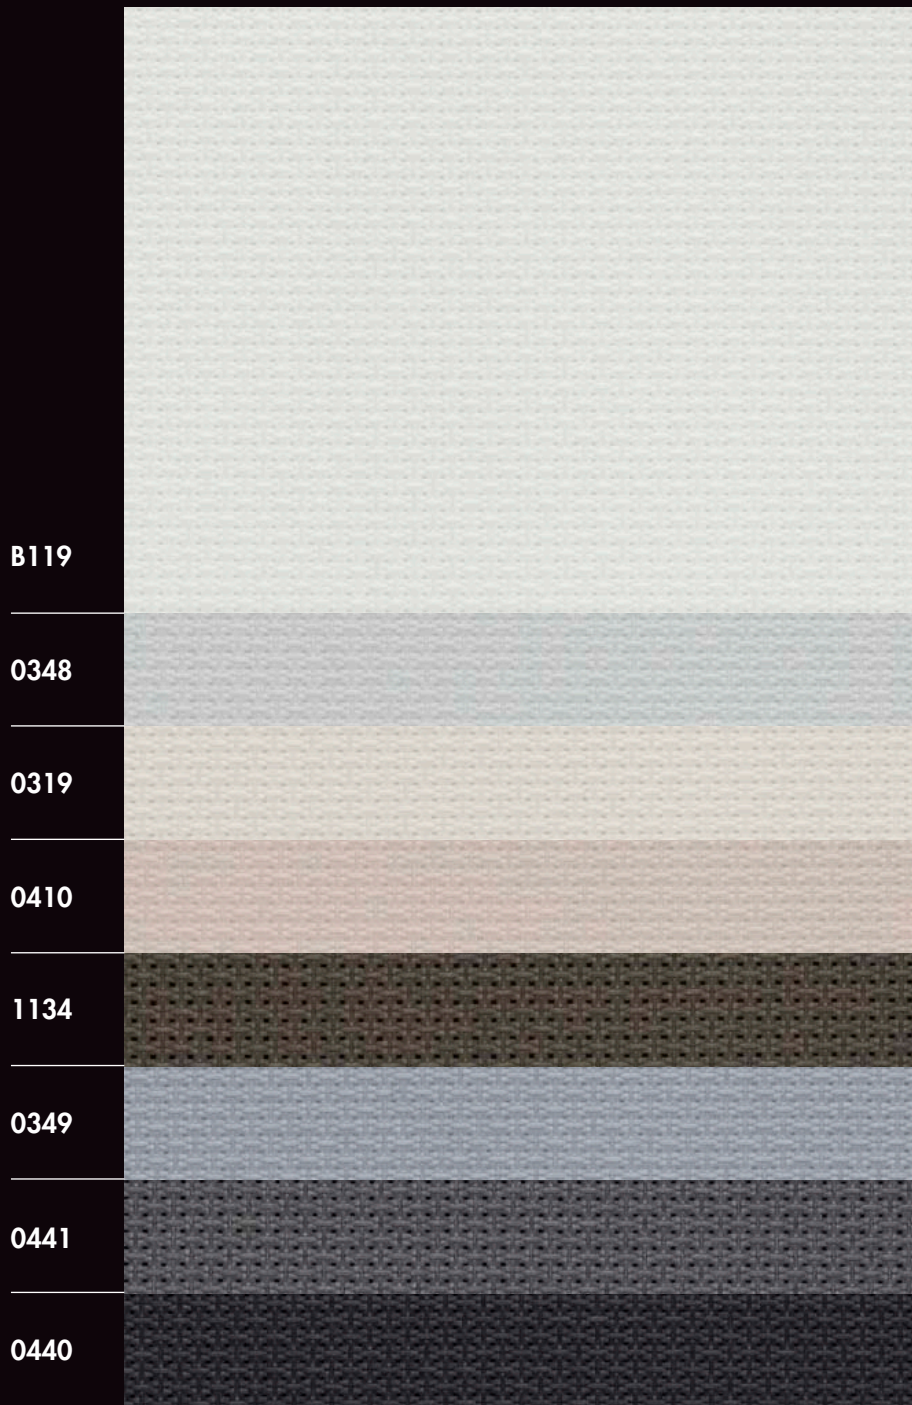


Colours may be slightly different from the actual ones

## SERVICE +

- Calculation of solar factor g<sub>tot</sub> (glazing + blind)
- Spectral values and thermal & optical factors available on request
- Specification sheet
- A4 samples and prototypes
- Training on fabrics functionality



0348

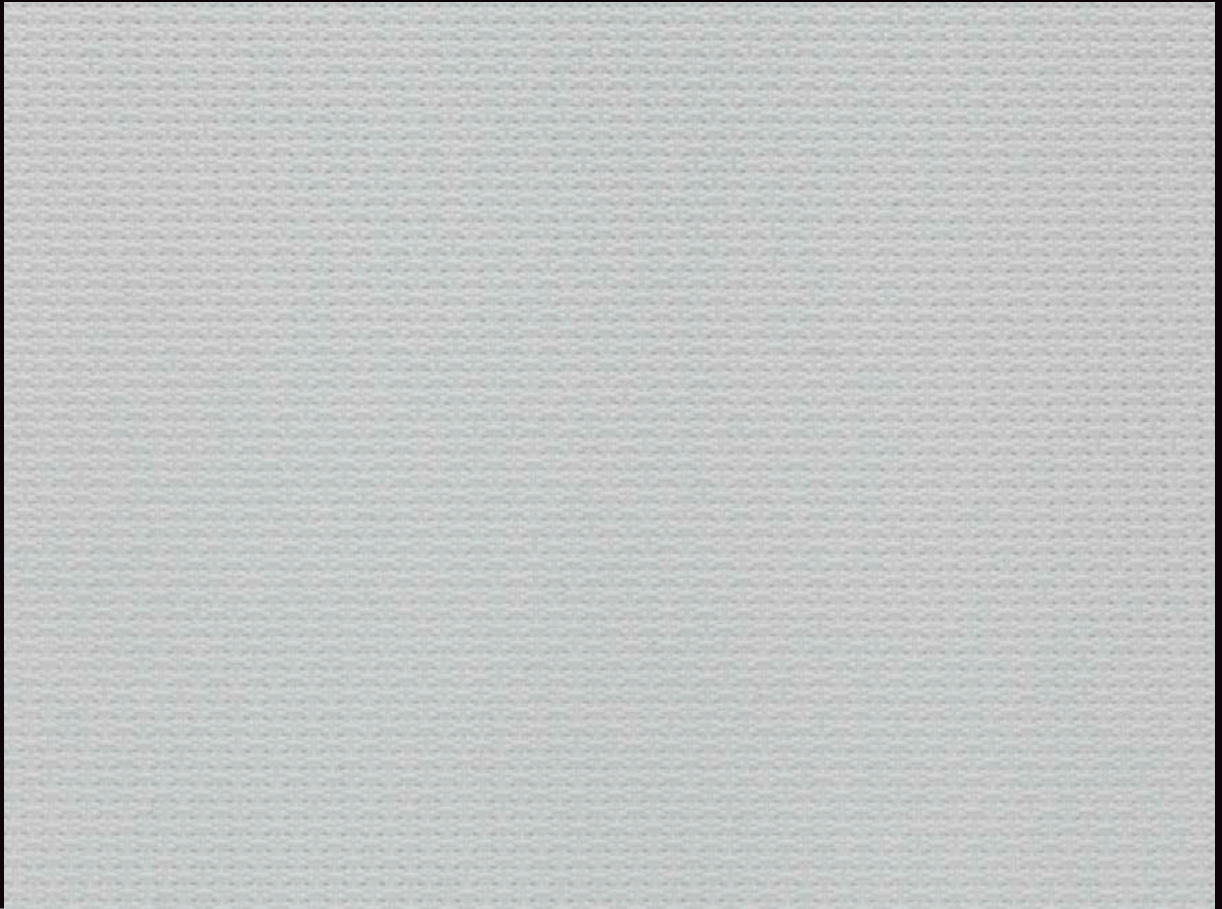

## THERMAL AND OPTICAL FACTORS in the European standard EN 14501

SCREEN NATURE OF 4%	Thermal factors					Optical factors
	Fabric			Fabric + Glazing / gtot internal blind		Tv
Colours	Ts	Rs	As	C : gv = 0,59	D : gv = 0,32	
<b>B119</b> White	33	<b>58</b>	9	0,36 <b>1</b>	0,18 <b>2</b>	<b>33</b>
<b>0319</b> Linen	30	<b>56</b>	14	0,36 <b>1</b>	0,19 <b>2</b>	<b>30</b>
<b>0348</b> Silver	29	<b>51</b>	20	0,39 <b>1</b>	0,20 <b>2</b>	<b>27</b>
<b>0410</b> Sable	25	<b>46</b>	29	0,40 <b>1</b>	0,22 <b>2</b>	<b>22</b>
<b>0349</b> Pearl	18	<b>34</b>	48	0,46 <b>1</b>	0,25 <b>2</b>	<b>13</b>
<b>0441</b> Grey	8	<b>14</b>	78	0,53 <b>0</b>	0,29 <b>2</b>	<b>7</b>
<b>1134</b> Bronze	7	<b>11</b>	82	0,54 <b>0</b>	0,30 <b>2</b>	<b>6</b>
<b>0440</b> Charcoal	5	<b>6</b>	89	0,55 <b>0</b>	0,31 <b>2</b>	<b>5</b>

gv = 0,59: Solar factor of standard glazing (C), low-emission 4/16/4 double glazing filled with Argon (U value thermal transmittance = 1,2 W/m<sup>2</sup>K).


gv = 0,32: Solar factor of standard glazing (D), reflecting low-emission 4/16/4 double glazing filled with Argon (U value thermal transmittance = 1,1 W/m<sup>2</sup>K).

Comfort classification according to EN 14501 standard: **0** very little effect **1** little effect **2** moderate effect **3** good effect **4** very good effect

Samples tested according to EN 14500 standard defining the measurements and calculation methods as specified in the standard EN 13363-2 "Solar protection devices combined with glazing calculation of solar and light transmittance - part 2: EN 13363-2 detailed method" and EN 410 "Glass in building - Determination of luminous and solar characteristics of glazing".

# SCREEN NATURE

0348

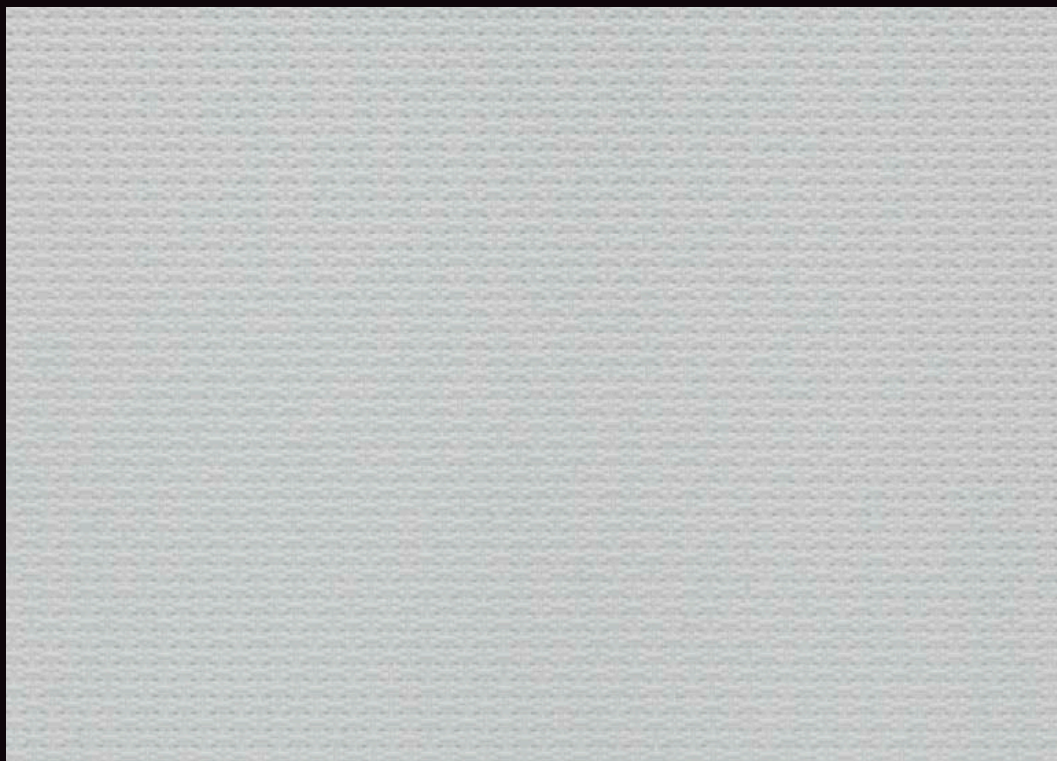

## INTERNAL APPLICATIONS




Roller blinds



Printable




[www.sunscreen-mermet.com](http://www.sunscreen-mermet.com)

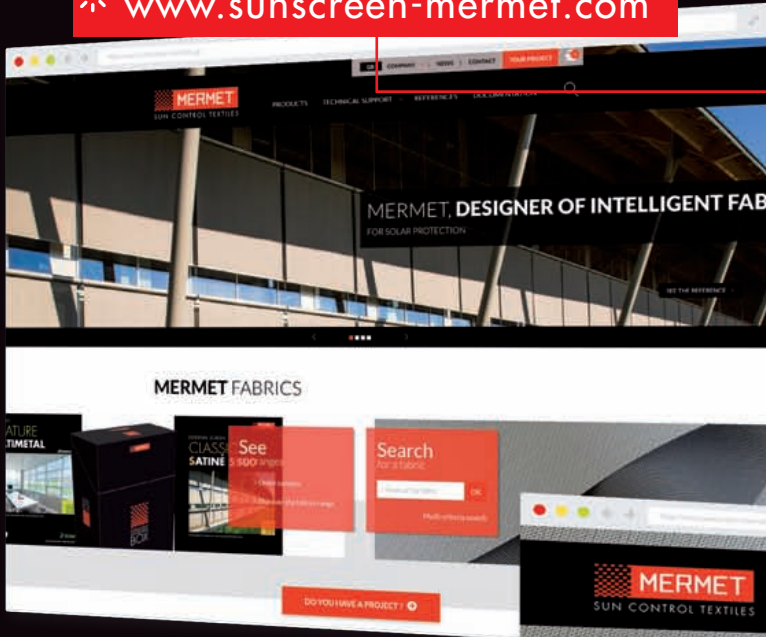

## FIND IN 3 CLICKS THE FABRIC BEST SUITED to your project

- A search engine with performances criteria
- Many documents for download
- All products information available
- A library of references

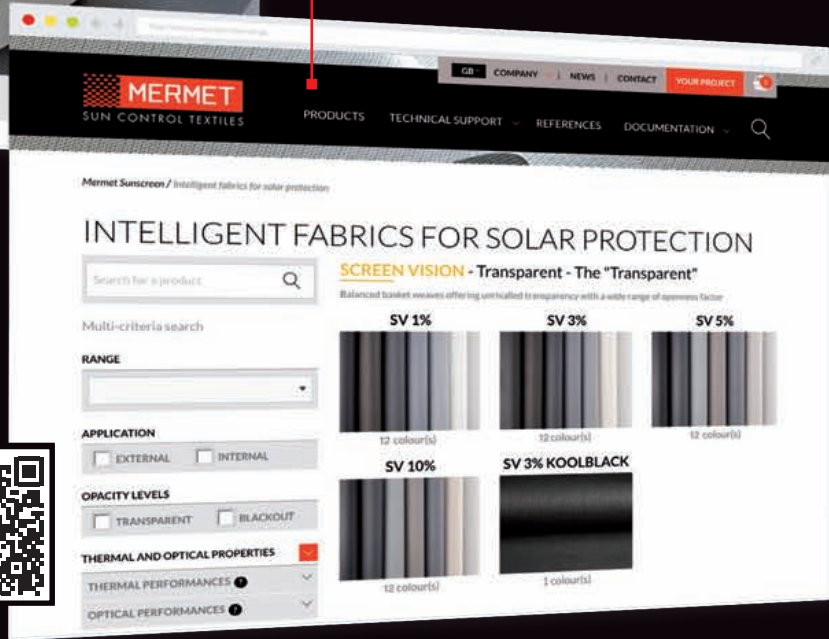

Go directly to the  
products catalog >



**MERMET COLLECTION** offers a wide choice of fabrics for external and internal application, from transparency to total darkness, for thermal and optical comfort. To receive other brochures from the collection, **contact us**.



SCREEN VISION / DESIGN / THERMIC / LOW E

EXTERNAL SCREEN CLASSIC

SCREEN NATURE

BLACKOUT 100 %

ACOUSTICS



58, chemin du Mont Maurin - 38630 Les Avenières Veyrins-Thuellin - France  
Tel. +33(0) 474 336 615 - Fax +33(0) 474 339 729

This brochure must be read and interpreted in accordance with the General Terms & Conditions of Sale of MERMET SAS, with which it forms an indissoluble whole. The General Terms & Conditions of Sale that are current at any time are those contained on the MERMET SAS website at the following address: [www.sunscreen-mermet.com](http://www.sunscreen-mermet.com).